

The logo for Shinland Optics is positioned in the upper right quadrant. It features the word "Shinland" in a large, bold, white sans-serif font. Above the "land" portion of "Shinland", the word "Optics" is written in a smaller, white sans-serif font. A small blue circle is placed above the letter "i" in "Shinland".

Optics
Shinland

Each Ray is brighter in Shinland

SL-D-075DA

Details

Material:	PMMA
Process:	Optical Transparent PMMA
MAX Diameter:	75mm
Height:	33mm
Bottom Diameter:	26.7mm
Matched Holder:	SL-HD-B
Matched Cover:	SL-075-WOF-LENS-B/SL-075-M-LENS-B SL-075-MOF-LENS-B/SL-075-F-LENS-B SL-075-FSQ-LENS-B/SL-075-WW-LENS-B
ROSH Compliant:	YES
Status:	Ready

Optical Properties

Code	Typ. Angle	Typ. efficiency
SL-D-075DA-S	15°	90%
SL-D-075DA-M	24°	90%
SL-D-075DA-F	38°	90%

Photo




Matched LED Source

CLU028	G4-17
CLU038	G4-10
CLU711	
CLU721	XTM-9
CLU731	
	EDC-38C
CXM-9	EDC-47C
CXM-14	EDC-57C-20
CXM-18	
CHM-9	NFCWL060B
CHM-14	NFCLL060B
	NVCWL024Z
CXA15	NVCLL024Z
CXA18	NFCWJ108B
CXA1830	NFCLJ108B
	NVExJ048Z
V13 Gen6	
V13 Gen7	
V15 Gen6	
V18 Gen6	
Vero 13	
Vero 18	
E8	
E13	
	Soleriq 13
	1204/1205
	1208
	LC020C
	LC040C
	LC026B
	LC033B

Dimensional Figure

SL-D-075DA



Measure Unit: mm

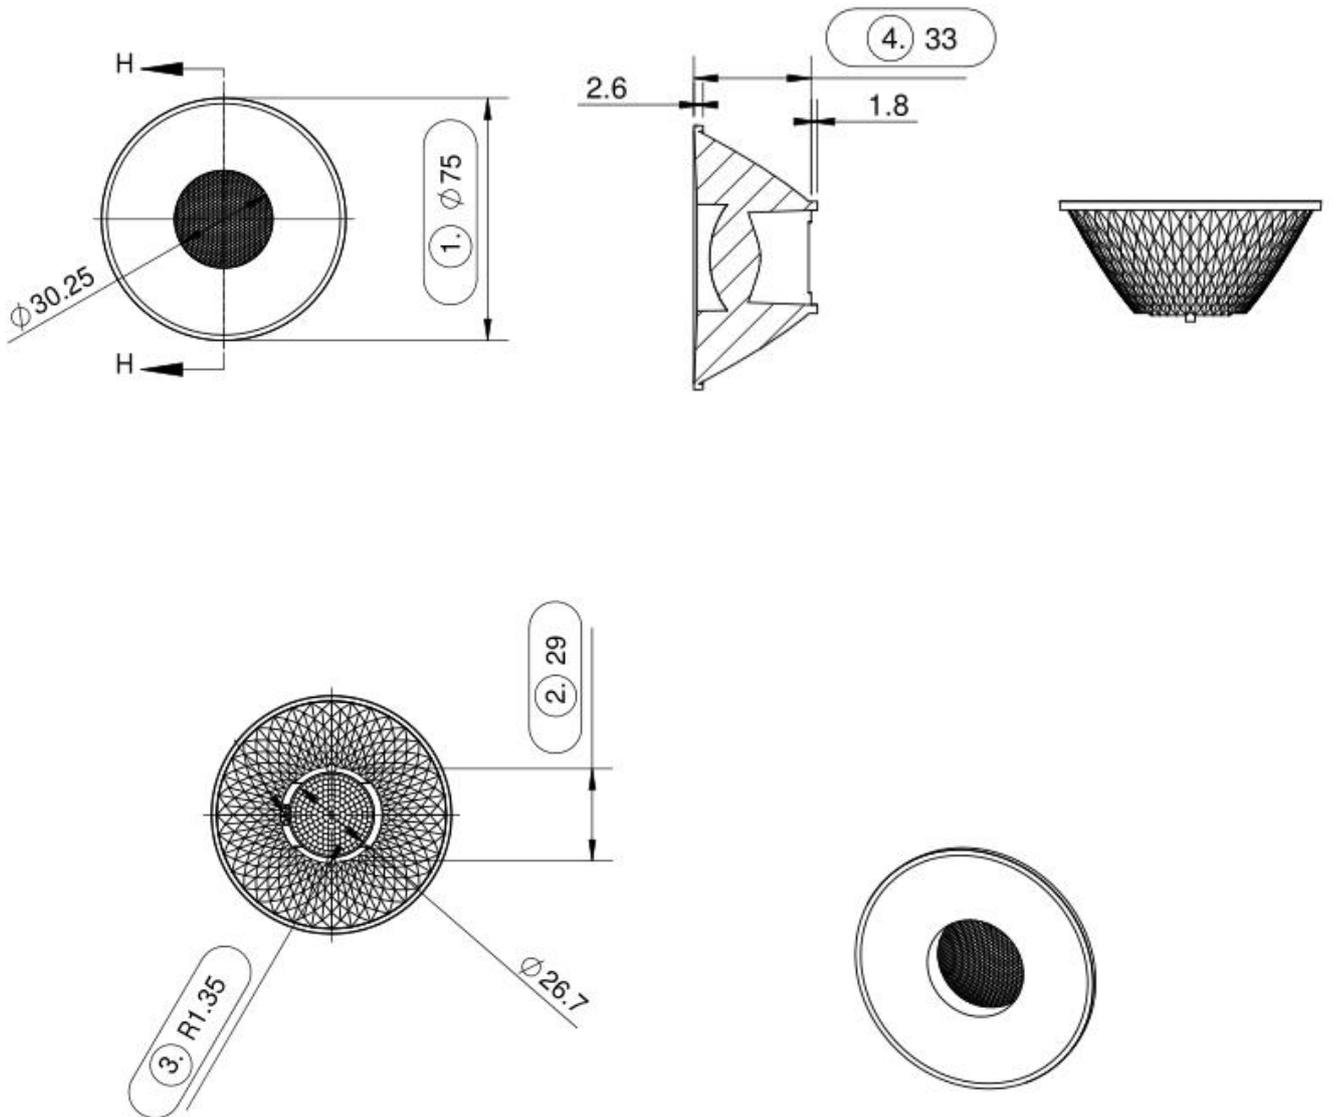

Dimensional Figure

SL-CLL02X-HD-B




Measure Unit: mm

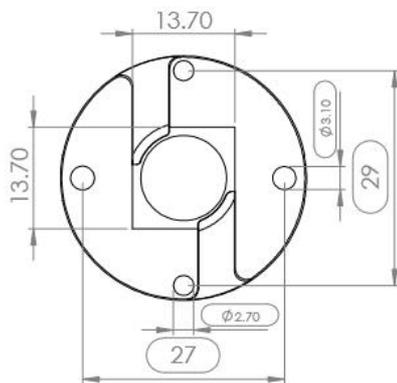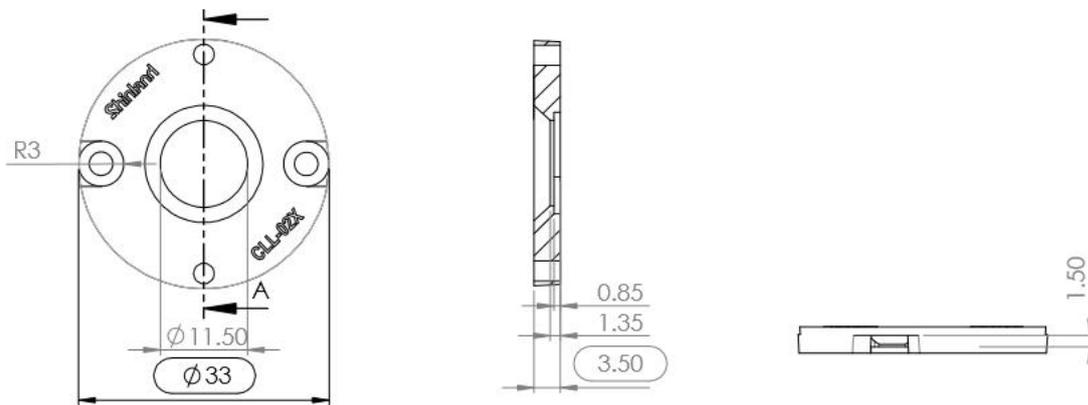

Dimensional Figure

SL-CXA18-HD-B



Measure Unit: mm

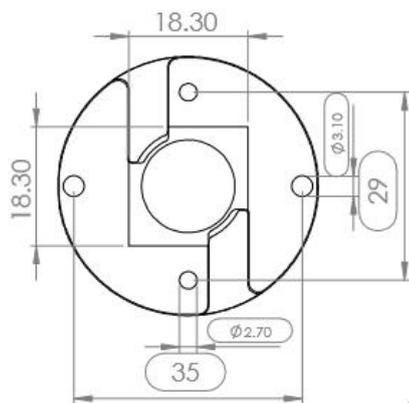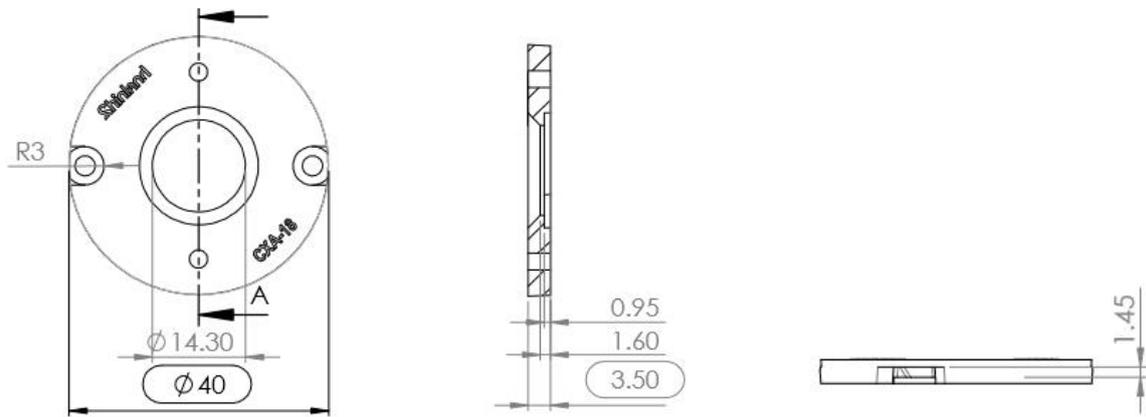

Dimensional Figure



SL-CXM-14-HD-B

Measure Unit: mm

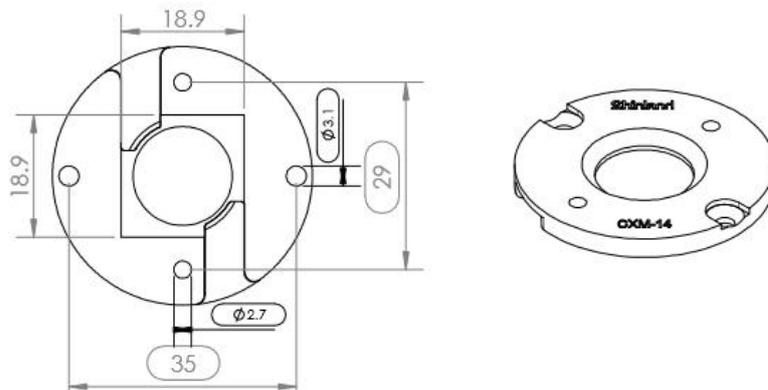
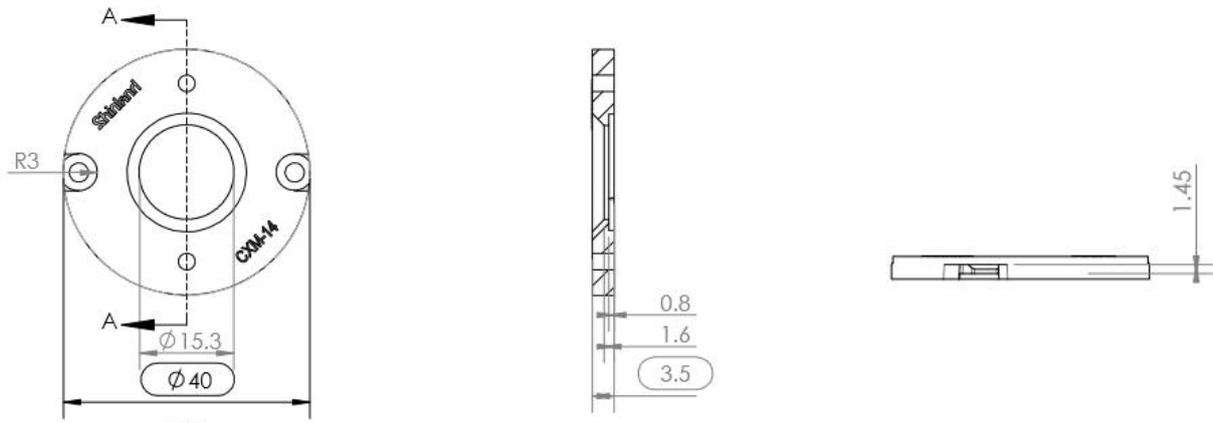


Distribution Curve Flux

SL-D-075DA&SL-CLL02X-HD-B

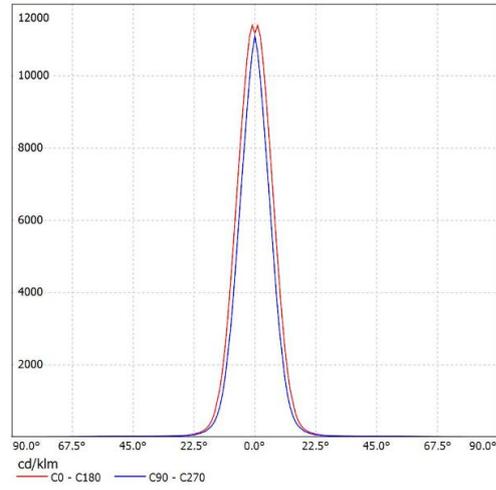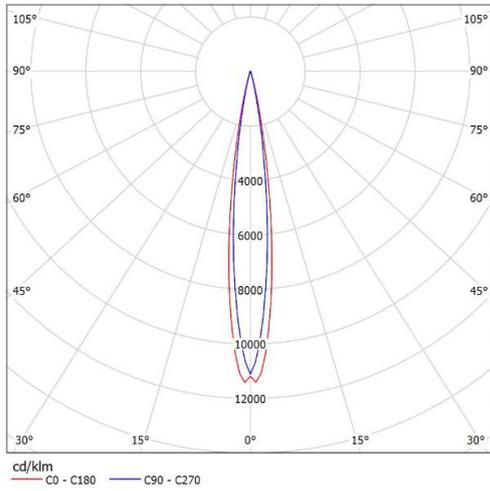



SL-D-075DA-S
K:13.31cd/lm,LED:CLL02X

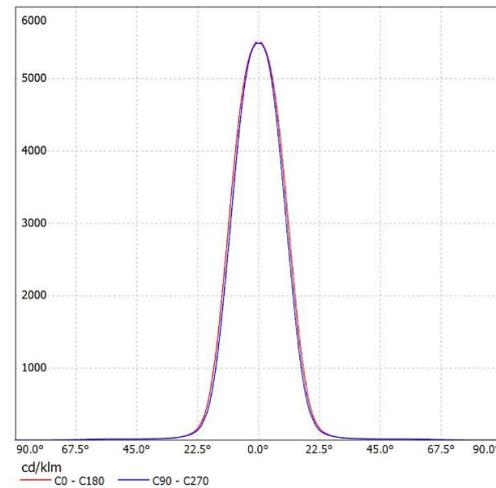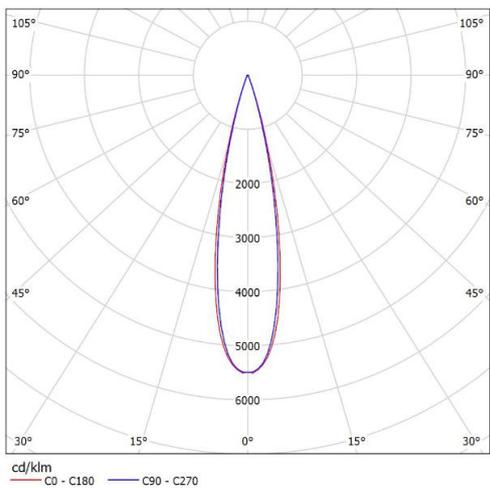



SL-D-075DA-M
K:6.22cd/lm,LED:CLL02X

Distribution Curve Flux

SL-D-075DA&SL-CXA18-HD-B

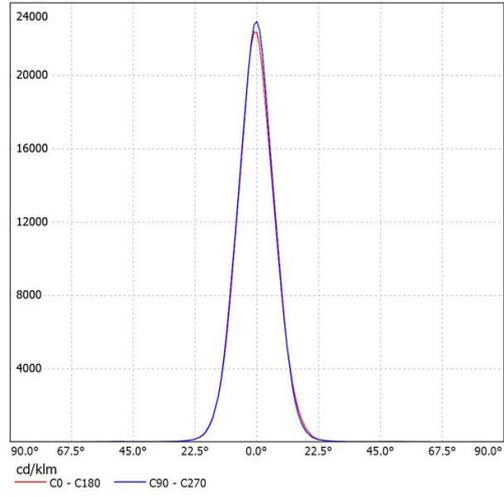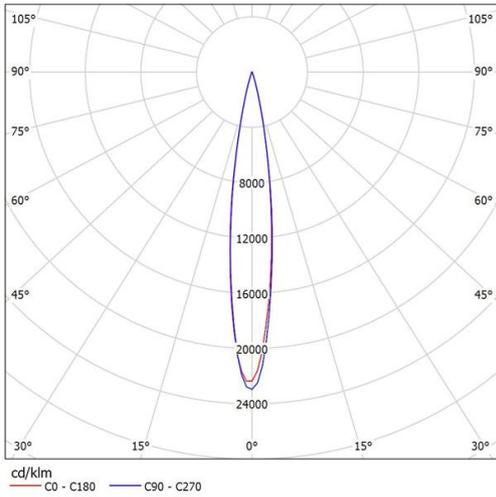



SL-D-075DA-S
K:11.43cd/lm,LED:CXA1820

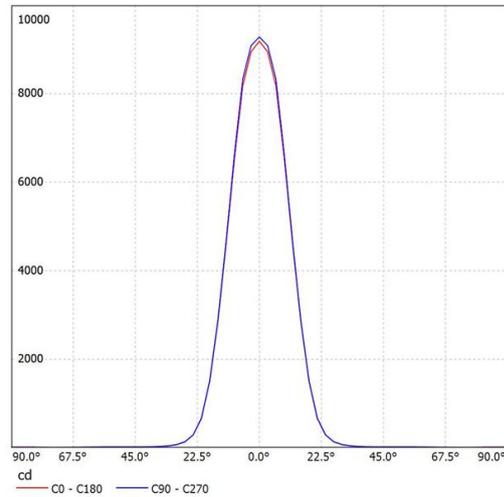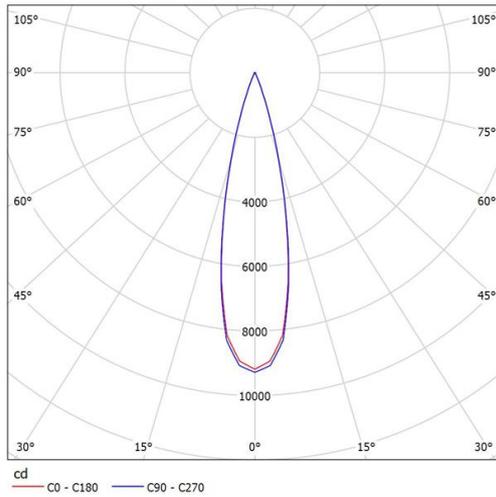



SL-D-075DA-M
K:5.54cd/lm,LED:CXA1820

Distribution Curve Flux

SL-D-075DA&SL-CXM-14-HD-B

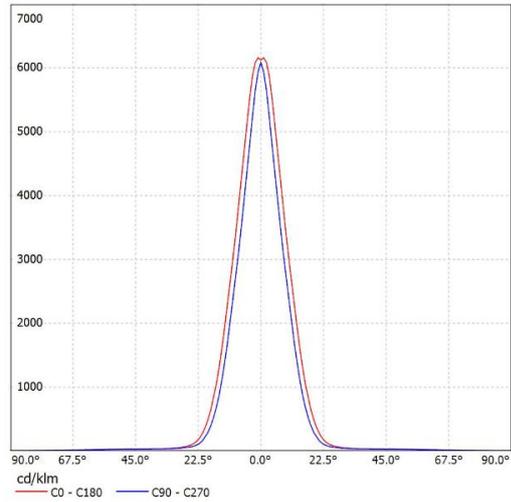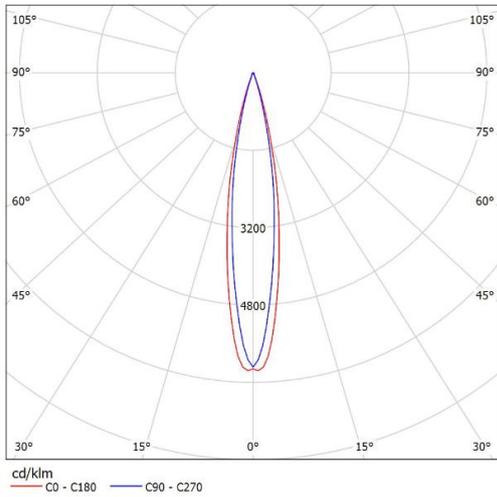

SL-D-075DA-S
K:7.17cd/lm,LED:CXM-14 Gen3

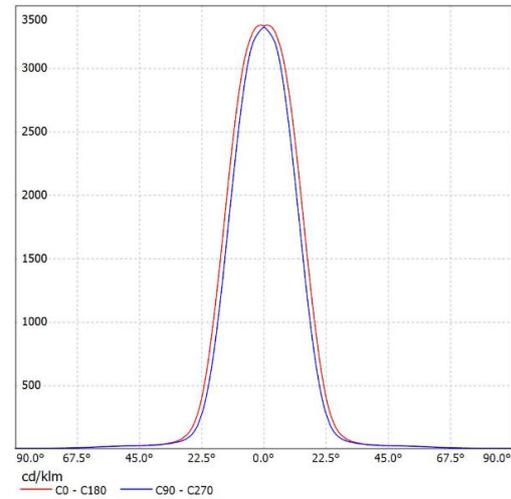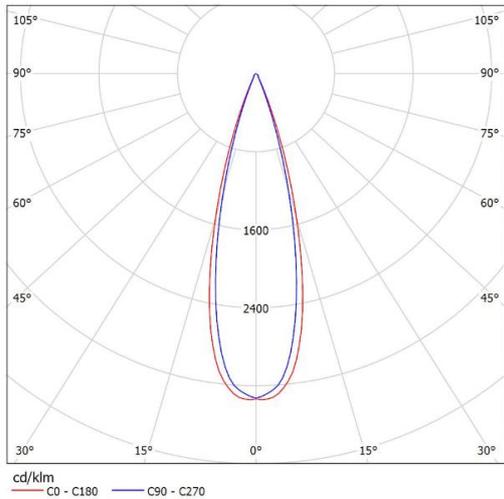

SL-D-075DA-M
K:3.75cd/lm,LED:CXM-14 Gen3

Package Description

SL-D-075DA

PART NO.	Number Per Box (pcs)	Box Weigh (kg)	BOX SIZE (cm)
SL-D-075DA-S	320	26.1	70*37*38
SL-D-075DA-M	320	25.8	70*37*38

Notes

- It is not allowed to scrub the reflective surface. If there is dust on the surface, please clean by soft cotton with little water.
 - It is forbidden to clean with industrial solvent such as ethanol.
 - Storage temperature: 0°C-40°C, and humidity:30%-95%.
 - Recommended operating temperature (PC) is <100°C.
 - Keep reflectors in package to void the dust.
 - Prohibit the reflector touch with acid or alkaline solvent
-

About Shinland

Shenzhen Shinland Co. Ltd,one of the longest and most professional company in lighting optical field,have 20 years experience.Different from other factory which only have simple process, all aspects included R&D,making mold,injection molding ,vacuum coating and market support are our company own vertically integrated production .

Insisting on 'Quality First, Service First' and pragmatic, enterprising spirit,building the market by quality, casting our brand by credibility and integrity ,Shinland now become the leading supplier of lighting optical solution in China.